




EZ3504 Chloride Analyser, 1 stream, Modbus RS485

Product #: EZ3504.99001C02

SGD Price: Contact Hach

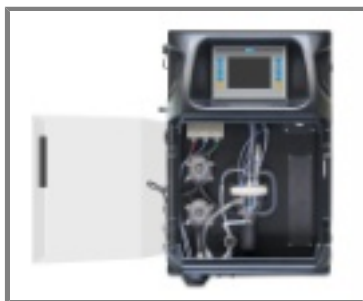

Online ion-selective Chloride measurements with standard addition for industrial applications

ISE technology for complex water matrices

The EZ3500 Series are used for water monitoring applications where ion-selective electrodes are the preferred analytical technique, but the water matrix is complex. Standard addition helps minimise matrix interferences that otherwise might contribute to the output signal of the electrode.

Discontinuous, automatic standard addition

The EZ3500 Series run discontinuous measurements with careful addition of a known standard in an analysis vessel. Discontinuous ISE analysis enhances control over the potentiometry, eliminates cross-contamination between cycles and reduces overall reagent consumption.

The EZ3500 Series combine unique technology with a set of analysis, control and communication features in an industrial analyser mainframe designed for the highest performance:

- Smart automatic features
- Control and communication via industrial panel PC
- Analogue and digital output options
- Multiple stream analysis (up to 8 streams)

There are many additional options available. Please contact Hach for more details.

Specifications

Alarm:	1x malfunctioning, 4x user-configurable, max. 24 VDC/0.5 A, potential free contacts
Ambient Temperature:	10 - 30 °C ±4 °C deviation at 5 - 95% relative humidity (non-condensing)
Calibration:	Automatic, 2-point; frequency freely programmable
Certifications:	CE compliant / UL certified
Cycle Time:	8 minutes
Digital outputs:	Modbus RS485
Dimensions (H x W x D):	690 mm x 465 mm x 330 mm
Drain:	Atmospheric pressure, vented, min. Ø 64 mm

Earth connection:	Dry and clean earth pole with low impedance (< 1 Ohm) using an earth cable of > 2.5 mm ²
Instrument air:	Dry and oil free according to ISA-S7.0.01-1996 quality standard for instrument air
Interferences:	Bromide, sulphide, iodide, cyanide ions may interfere. Mercury must be absent. Ammonia and thiosulphate may interfere. Fats, oil, proteins, surfactants and tar.
Lower Limit of Detection (LOD):	≤ 1 mg/L (range 1 - 10 mg/L)
Material:	Hinged part: Thermoform ABS, door: plexiglass Wall section: Galvanised steel, powder coated
Measurement method:	Discontinuous measurement by combined ion-selective electrode with standard addition
Number of sample streams:	1 stream Optional: 1 to 8 streams
Output:	Modbus RS485 Optional: Active 4 - 20 mA max. 500 Ohm load, 1 to 8 outputs RS232, Modbus TCP/IP
Parameter:	Chloride
Power:	110 - 220 VAC, 2 A, 50/60Hz Max. power consumption: 150 VA Other voltages available on request
Precision:	Better than 2% full scale range for standard test solutions
Protection Class:	Analyser cabinet: IP55 / Panel PC: IP65
Range:	10 - 100 mg/L Cl ⁻ Optional: 10 - 25 mg/L Cl ⁻ 10 - 50 mg/L Cl ⁻
Reagent Requirements:	Keep between 10 - 30 °C
Sample Flow Rate:	100 - 300 mL/min
Sample Pressure:	By external overflow vessel
Sample Quality:	Maximum particle size 100 µm, < 0.1 g/L; Turbidity < 50 NTU
Sample Temperature:	10 - 30 °C
Validation:	Automatic; frequency freely programmable
Warranty:	2 years
Weight:	25 kg